

Blå elastik gummibandager shore A65+/-3, vulkaniseret på sort nylonfælg. Monteret i rustfri rivetterede industri-gaffler uden centerbolt, kvalitet AISI 304. Svingbare gaffler er med dobbelt kuglekrans, kvalitet AISI 420. Bremsegafler er med totalbremse. Anvendelsestemperatur fra -20°C til +60°C.

Blue elastic rubber coating, hardness 65+/-3 shore A, on black nylon centre. Medium duty castors in stainless steel rivetted without king-pin, AISI 304. Swivel castors with double ball races in AISI 420. Combined swivel and wheel brake. Temperature range: -20°C to +60°C. (-4°F/+140°F).

MIDDEL BELASTNING RUSTFRI


BLÅ ELASTIK GUMMIHJUL
Ø100 TIL Ø200 MM.

BELASTNING FRA
200–390 KG.

MEDIUM DUTY STAINLESS STEEL

BLUE ELASTIC RUBBER WHEELS
SIZE: Ø100 TO Ø200 MM.

LOAD CAPACITY:
200–390 KG.

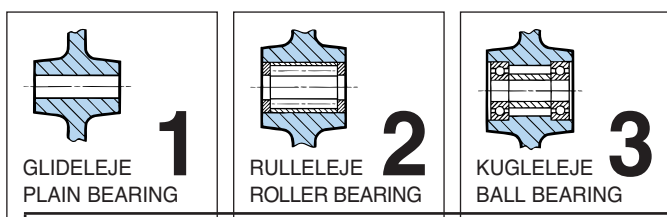

Ø	KG	Icon	BESTILLINGSNR. ARTICLE NO.				MONTERINGSMÅL MOUNTING MEASUREMENTS							BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
			Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon		Icon	Icon	Icon	Icon	KG
100	2	200	6658123	6658323	6658423	6658533	6658713	130	39	106x86	80x60	9	12	112	465100	30	40	15	200
125	2	200	6658133	6658333	6658433	6658553	6658723	158	40	106x87	80x60	9	12	118	465140	36	48	15	250
125	2	250	-	-	6658445	6658565	6658745	161	47	135x110	105x80	11	-	137	465140	36	48	15	250
160	2	300	6658168	6658368	6658458	6658578	6658768	200	52	136x111	105x80	11	16	139	465160	40	59	20	300
200	2	390	6658178	6658378	6658478	6658608	6658778	238	53	135x111	105x80	11	16	136	465210	40	60	20	400