

ROTA DAN A/S

Sorte elastik gummibandager shore A73+/-3 vulkaniseret på aluminiumcenter. Monteret i zinkkromatiserede rivetterede middelsvære industrigafler uden centerbolt. Svingbare gafler er med dobbelt kuglekrans. Bremsegafler er med totalbremse. Anvendelsestemperatur fra -20°C til +70°C.

Black elastic rubber coating, hardness 73+/-3 shore A, on die-cast aluminium centre. Medium-heavy duty castors in pressed sheet steel with zincplated finish. Swivel castors with double steel ball races. Combined swivel and wheel brake. Temperature range: -20°C to +70°C. (-4°F/+158°F).

MIDDEL BELASTNING


SORTE ELASTIK GUMMIHJUL MED ALUMINIUMCENTER. Ø100 TIL Ø200 MM.

BELASTNING FRA **150-450 KG.**

MEDIUM DUTY

BLACK ELASTIC RUBBER WHEELS WITH ALUMINIUM CENTRE. SIZE: Ø100 TO Ø200 MM.

LOAD CAPACITY: **150-450 KG.**

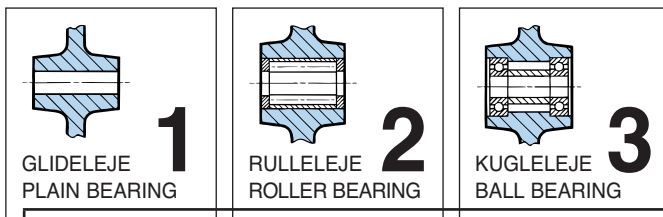

Ø	H	W	S	BESTILLINGSNR. ARTICLE NO.			MONTERINGSMÅL MOUNTING MEASUREMENTS							BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
				1	2	3	1	2	3	4	5	6	7		8	9	10	11	12
100	3	150	-	-	6666425	6666545	6666725	129	40	106x88	80x60	9	-	132	469492	35	40	15	150
125	3	180	-	-	6666445	6666605	6666745	157	40	106x88	80x60	9	-	134	469508	40	40	15	180
160	3	300	-	-	6666465	6666625	-	195	53	135x115	105x80	11	-	-	469542	40	60	20	300
180	3	350	-	-	6666480	6666640	-	230	48	135x115	105x80	11	-	-	469567	40	60	20	350
200	3	450	-	-	6666485	6666645	6666785	240	48	135x115	105x80	11	-	163	469577	40	60	20	450

01/98

Alle mål er i mm.
All measurements are in mm.