

Grå elastik gummibandager shore A73+/-3 vulkaniseret på aluminiumcenter. Monteret i zinkkromatiserede rivetterede middelsvære industrigafler uden centerbolt. Svingbare gafler er med dobbelt kuglekrans. Bremsegafler er med totalbremse. Anvendelsestemperatur fra -20°C til +70°C.

Grey elastic rubber coating, hardness 73+/-3 shore A, on die-cast aluminium centre. Medium-heavy duty castors in pressed sheet steel with zincplated finish. Swivel castors with double steel ball races. Combined swivel and wheel brake. Temperature range: -20°C to +70°C. (-4°F/+158°F).

## MIDDEL BELASTNING


GRÅ ELASTIK GUMMIHJUL MED ALUMINIUMCENTER Ø100 TIL Ø200 MM.

BELASTNING FRA **150 – 450 KG.**

## MEDIUM DUTY

GREY ELASTIC RUBBER WHEELS WITH ALUMINIUM CENTRE SIZE: Ø80 TO Ø280 MM.

LOAD CAPACITY: **150 – 450 KG.**

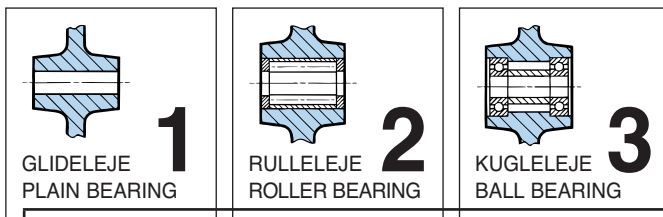

Ø	H	W	S	T	BESTILLINGSNR. ARTICLE NO.			MONTERINGSMÅL MOUNTING MEASUREMENTS						BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
					Ø	H	W	S	T	Ø	H	W	S		T	Ø	H	W	S
100	3	150	-	-	6672425	6672545	6672725	129	40	106x88	80x60	9	-	132	469848	35	40	15	150
125	3	180	-	-	6672445	6672605	6672745	157	40	106x88	80x60	9	-	134	469858	40	40	15	180
160	3	300	-	-	6672465	6672625	-	195	53	135x115	105x80	11	-	-	469882	40	60	20	300
180	3	350	-	-	6672480	6672640	-	230	48	135x115	105x80	11	-	-	469892	40	60	20	350
200	3	450	-	-	6672485	6672645	6672785	240	48	135x115	105x80	11	-	163	469912	40	60	20	450

01/98

Alle mål er i mm.  
All measurements are in mm.