

Varmebestandige sorte termoplastiske kunststofhjul, monteret i rustfri rivetterede industrigafler uden centerbolt. Kvalitet AISI 304.

Svingbare gafler er med dobbelt kuglekrans. Kvalitet AISI 420.

Anvendelsestemperatur fra **-40°C til +260°C**.

Heat resistant reinforced black polyamide wheels.

Medium duty stainless steel castors. Rivetted and without king-pin in AISI 304.

Swivel castors with double ball races in AISI 420.

Temperature range: **-40°C to +260°C. (-40°F/+500°F)**.

MIDDEL BELASTNING RUSTFRI


VARMEBESTANDIGE SORTE TERMOPLASTISKE KUNSTSTOFHJUL. Ø80 TIL Ø200 MM.

BELASTNING FRA **100 – 200 KG.**

MEDIUM DUTY STAINLESS STEEL

REINFORCED BLACK POLYAMIDE WHEELS SIZE: Ø80 TO Ø200 MM.

LOAD CAPACITY: **100 – 200 KG.**

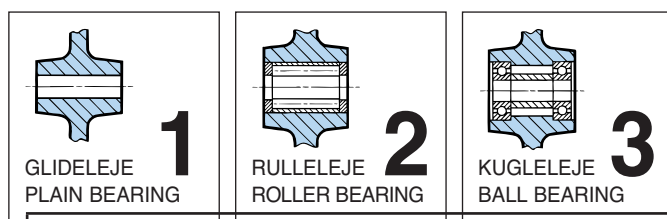

Ø	Type	KG	BESTILLINGSNR. ARTICLE NO.						MONTERINGSMÅL MOUNTING MEASUREMENTS							BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
			1	2	3	4	5	6	1	2	3	4	5	6	7		8	9	10	11	12
80	1	100	6170108	-	6170408	6170538	-	109	38	106x86	80x60	9	12	-	415040	33	40	12	100		
80	2	100	6172108	-	6172408	6172538	-	109	38	106x86	80x60	9	12	-	415300	33	40	12	100		
100	1	125	6170128	-	6170428	6170558	-	130	41	106x86	80x60	9	12	-	415070	34	40	12	125		
100	2	125	6172128	-	6172428	6172558	-	130	41	106x86	80x60	9	12	-	415320	34	40	12	125		
125	1	150	6170138	-	6170438	6170568	-	157	41	106x86	80x60	9	12	-	415120	38	44	15	150		
125	2	150	6172138	-	6172438	6172568	-	157	41	106x86	80x60	9	12	-	415340	38	44	12	150		
150	1	200	6170158	-	6170448	6170578	-	195	49	136x111	105x80	9	12	-	415140	52	59	20	200		
150	2	200	6172158	-	6172448	6172578	-	195	49	136x111	105x80	9	12	-	415360	52	59	20	200		
160	1	200	6170168	-	6170458	6170588	-	200	49	136x111	105x80	9	12	-	415170	52	59	20	200		
160	2	200	6172168	-	6172458	6172588	-	200	49	136x111	105x80	9	12	-	415380	52	59	20	200		
200	1	200	6170188	-	6170488	6170618	-	238	54	135x111	105x80	11	16	-	415220	52	59	20	200		
200	2	200	6172188	-	6172488	6172618	-	238	54	135x111	105x80	11	16	-	415400	52	59	20	200		