

Hvide termoplastiske kunststofhjul, shore $D_{62\pm 2}$, monteret i rustfri sværlastgafler uden centerbolt. Kvalitet AISI 304. Svingbare gafler med smørenippel og forseglet dobbelt kuglekrans kvalitet AISI 420 i udfæsedede og polerede kuglespor. Bremsegafler er med totalbremse. Anvendelsestemperatur fra -20°C til $+70^{\circ}\text{C}$.


Thermoplastic wheels in colour white hardness 62 ± 2 shore D . Heavy duty stainless steel castors without king-pin in AISI 304. Swivel castors with grease nipple and sealed double ball races in AISI 420. Bearing raceways are machined for line contact with the balls. Combined swivel and wheel brake. Temperature range: -20°C to $+70^{\circ}\text{C}$. ($-4^{\circ}\text{F}/+158^{\circ}\text{F}$).

SVÆRLAST RUSTFRI

TERMOPLASTISKE KUNSTSTOF- HJUL HVIDE. Ø100 TIL Ø200 MM. **BELASTNING FRA 350 – 800 KG.**

HEAVY DUTY STAINLESS STEEL

WHITE THERMOPLASTIC WHEELS LOAD CAPACITY: **350 – 800 KG.** SIZE: Ø100 TO Ø200 MM

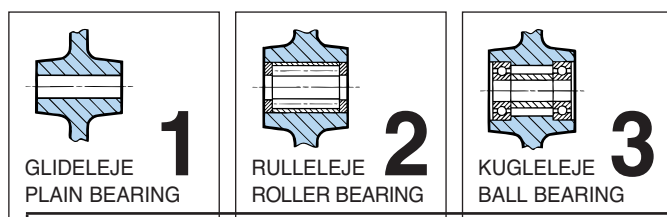

Ø	Hjul	KG	Svingbar	Bremse	BESTILLINGSNR. ARTICLE NO.			MONTERINGSMÅL MOUNTING MEASUREMENTS							BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS			
					1	2	3	H	B	L	W	W	W	W		W	H	B	Ø
100	1	350	-	-	6260420	6260550	6260720	133	41	140x110	105x80	12	-	115	420160	34	44	12	350
100	2	350	-	-	6262420	6262550	6262720	133	41	140x110	105x80	12	-	115	422126	34	44	12	350
125	1	550	-	-	6260430	6260560	6260730	164	50	140x110	105x80	12	-	135	420214	51	59	20	600
125	2	550	-	-	6262430	6262560	6262730	164	50	140x110	105x80	12	-	135	422161	51	61	20	600
150	1	650	-	-	6260450	6260580	6260750	188	55	140x110	105x80	12	-	135	420273	51	61	20	650
150	2	750	-	-	6262450	6262580	6262750	188	55	140x110	105x80	12	-	135	422205	51	61	20	800
160	1	700	-	-	6260470	6260600	6260770	193	55	140x110	105x80	12	-	135	420286	51	61	20	700
160	2	750	-	-	6262470	6262600	6262770	193	55	140x110	105x80	12	-	135	422270	51	61	20	800
200	1	600	-	-	6260490	6260620	6260790	242	58	140x110	105x80	12	-	135	420310	51	60	20	600
200	2	800	-	-	6262490	6262620	6262790	242	58	140x110	105x80	12	-	135	422281	51	61	20	1000