


Grå polyurethanhjul shore A85+/-3 med naturfarvet nyloncenter.
 Monteret i zinkkromatiserede rivetterede middelsvære
 industrigafler uden centerbolt.
 Svingbare gafler er med dobbelt kuglekrans.
 Bremsegafler er med totalbremse.
 Anvendelsestemperatur fra -30°C til +80°C.

Grey polyurethane tyre. Hardness 85+/-3 shore A with nylon
 centre. Colour nature. Medium-heavy duty castors in pressed
 sheet steel with zincplated finish.
 Swivel castors with double steel ball races.
 Combined swivel and wheel brake.
 Temperature range: -30°C to +80°C. (-22°F/+176°F).

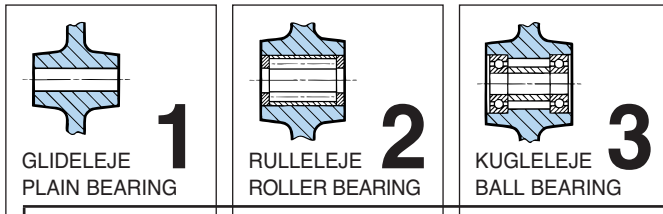

		BESTILLINGSNR. ARTICLE NO.						MONTERINGSMÅL MOUNTING MEASUREMENTS						BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
Ø	KG	Ø	Ø	Ø	Ø	Ø	H	B	B	B	B	B	B	Ø	B	B	B	KG	
100	2	150	-	-	6466425	6466545	6466725	129	40	106x88	80x60	9	-	132	446618	34	48	15	150
100	3	200	-	-	6467425	6467545	6467725	129	40	106x88	80x60	9	-	132	447610	34	49	10	200
125	2	250	-	-	6466435	6466565	6466735	157	40	106x88	80x60	9	-	134	446640	37	48	15	250
125	3	250	-	-	6467440	6467550	6467740	157	40	106x88	80x60	9	-	134	447660	38	49	10	250
150	2	400	-	-	6466455	6466585	6466755	190	50	135x115	105x80	11	-	161	446700	40	58	20	400
150	3	400	-	-	6467455	6467585	6467755	190	50	135x115	105x80	11	-	161	447750	40	58	20	400
200	2	600	-	-	6466485	6466615	6466785	240	47	135x115	105x80	11	-	163	446770	45	58	20	600
200	3	600	-	-	6467500	6467630	6467790	240	47	135x115	105x80	11	-	163	447825	45	58	20	600

12/99

Alle mål er i mm.
 All measurements are in mm.

HØJ BELASTNING

GRÅ POLYURETHANHJUL MED
 NYLONCENTER. Ø100 TIL Ø200 MM.

BELASTNING FRA
150 – 600 KG.

HEAVY DUTY

GREY POLYURETHANE TYRED, NYLON
 CENTRED WHEELS. Ø100 TO Ø200 MM.

LOAD CAPACITY:
150 – 600 KG.

