

Grå polyurethanhjul shore A85+/-3 med naturfarvet nyloncenter.
 Monteret i rustfri rivetterede industrigafler uden centerbolt.
 Kvalitet AISI 304.

Svingbare gafler er med dobbelt kuglekrans kvalitet AISI 420.

Bremsegafler er med totalbremse.

Anvendelsestemperatur fra -30°C til +80°C.

Grey polyurethane tyre, hardness 85+/-3 shore A with nylon centre. Colour nature. Medium duty stainless steel castors rivetted and without king-pin in AISI 304.

Swivel castors with double ball races in AISI 420.

Combined swivel and wheel brake.

Temperature range: -30°C to +80°C. (-22°F/+176°F).

MIDDEL BELASTNING RUSTFRI


GRÅ POLYURETHANHJUL MED NYLONCENTER. Ø80 TIL Ø200 MM.

BELASTNING FRA **150 – 390 KG.**

MEDIUM DUTY STAINLESS STEEL

GREY POLYURETHANE TYRED, NYLON CENTRED WHEELS. Ø80 TO Ø200 MM.

LOAD CAPACITY: **150 – 390 KG.**

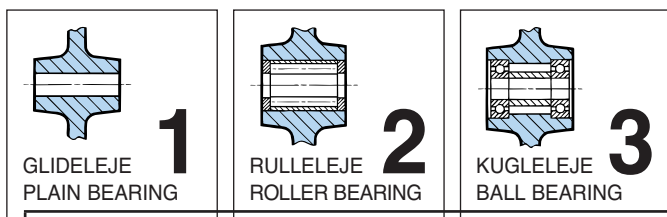

Ø	Hjul	KG	BESTILLINGSNR. ARTICLE NO.						MONTERINGSMÅL MOUNTING MEASUREMENTS						BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS				
			1	2	3	4	5	6	1	2	3	4	5	6		7	8	9	10	11
80	2	150	6477118	6477318	6477418	6477538	6477718	108	38	106x86	80x60	9	12	112	447045	34	40	12	150	
80	3	150	6478118	6478318	6478418	6478538	6478718	108	38	106x86	80x60	9	12	112	447562	34	40	8	150	
100	2	200	6477128	6477328	6477428	6477548	6477728	130	41	106x86	80x60	9	12	113	447100	34	39	15	150	
100	3	200	6478128	6478328	6478428	6478548	6478728	130	41	106x86	80x60	9	12	113	447602	36	40	8	200	
125	2	200	6477138	6477338	6477438	6477558	6477738	157	41	106x86	80x60	9	12	118	447130	37	45	15	250	
125	3	200	6478138	6478338	6478438	6478558	6478738	157	41	106x86	80x60	9	12	118	447662	40	49	10	250	
150	1	200	6475158	6475348	6475458	6475598	6475758	183	41	106x86	80x60	9	12	118	446174	40	50	20	400	
150	2	200	6477158	6477348	6477458	6477598	6477758	183	41	106x86	80x60	9	12	118	447165	40	50	20	400	
150	1	325	6475168	6475368	6475468	6475608	6475768	193	49	135x111	105x80	11	16	139	446180	40	58	20	400	
150	2	325	6477168	6477368	6477468	6477608	6477768	193	49	135x111	105x80	11	16	139	447220	40	58	20	400	
160	1	325	6475195	6475375	6475485	6475615	6475775	198	48	136x111	105x80	11	16	137	446230	45	58	20	400	
160	2	325	6477195	6477375	6477485	6477615	6477775	198	48	136x111	105x80	11	16	137	447250	45	58	20	400	
200	1	390	6475218	6475378	6475498	6475628	6475788	238	53	135x111	105x80	11	16	136	446310	45	58	20	600	
200	2	390	6477218	6477378	6477498	6477628	6477788	238	53	135x111	105x80	11	16	136	447270	45	58	20	600	