

Polyurethan bandager shore A95+/-3 vulkaniseret på støbejernscenter.

Monteret i opsvejste lakerede sværlastgafler.
Svingbare gaffler med forsejlet axial kugleleje og konisk rulleleje.

Anvendelsestemperatur fra -30°C til +80°C.

Polyurethane coating hardness 95+/-3 shore A with cast iron centre.

Heavy duty fabricated castors with painted finish.
Swivel castors with sealed axial ball bearing and tapered roller bearing.

Temperature range: -30°C to +80°C. (-22°F/+176°F).

SVÆRLAST



POLYURETHANHJUL MED STØBEJERNSCENTER. Ø85 TIL Ø250MM.

BELASTNING FRA **550-1400 KG.**

HEAVY DUTY

POLYURETHANE WHEELS WITH CAST IRON CENTRE. SIZE: Ø85 TO Ø250 MM.

LOAD CAPACITY: **550 - 1400 KG.**

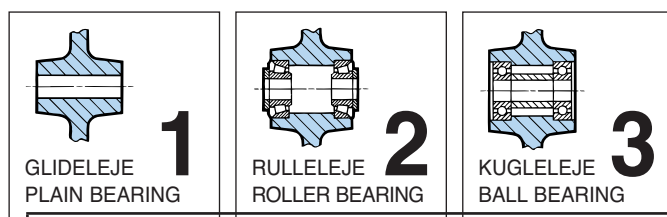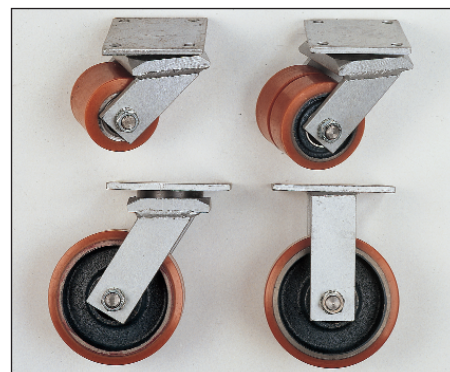

Ø	H	W	BESTILLINGSNR. ARTICLE NO.			MONTERINGSMÅL MOUNTING MEASUREMENTS								BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS			
			U	V	W	U	V	W	U	V	W	U	V		W	Ø	W	H
85	3	750	6533419	6533549	-	125	51	137x110	105x80	12	-	-	457594	75	75	20	750	
100	3	600	6533429	6533559	-	145	50	137x112	105x80	12	-	-	453064	2x40	2x39	20	300	
125	3	550	6533439	6533569	-	171	46	136x111	105x80	12	-	-	453098	50	50	20	550	
150	3	800	6533449	6533589	-	205	54	136x111	105x80	12	-	-	453137	50	59	20	800	
160	3	700	6533469	6533599	-	212	54	136x111	105x80	12	-	-	453147	50	59	20	700	
200	3	1000	6533479	6533609	-	249	57	181x155	125x102	16	-	-	453176	50	59	25	1000	
250	3	1400	6533499	6533629	-	306	59	183x155	127x103	16	-	-	453224	60	73	25	1400	

12/99

Alle mål er i mm.
All measurements are in mm.