

Polyurethan bandager shore A95+/-3
vulkaniseret på stålcentre.
Anvendelsestemperatur fra -30°C til +80°C.

Polyurethane coating hardness 95+/-3
shore A with steel centre.
Temperature range: -30°C to +80°C. (-22°F/+176°F).

POLYURETHANRULLER MED STÅLCENTER


Ø70 TIL Ø85 MM.

**BELASTNING FRA
400 – 1050 KG.**

POLYURETHANE ROLLERS WITH STEEL TUBE CENTRE

SIZE: Ø70 TO Ø85 MM.

**LOAD CAPACITY:
400 – 1050 KG.**

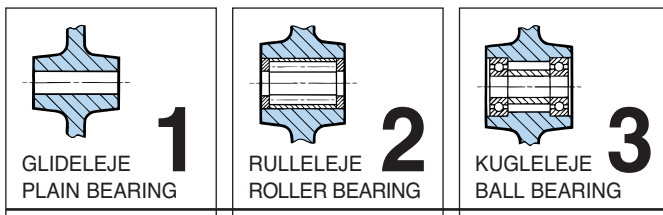

					BESTILLINGSNR. ARTICLE NO.				
Ø	h	b	L	3	KG	Ø17	Ø20	Ø25	UDEN LEJER WITHOUT BEARINGS
70	70	70	35x11	3	500	457102	-	-	457100
80	50	50	47x14	3	460	457122	457124	457126	457120
82	44	44	47x16	3	400	-	457184	-	457180
82	60	60	47x16	3	600	457202	457204	457206	457200
82	60	60	52x19	3	580	-	457212	457214	457210
82	70	70	47x16	3	700	457242	457244	457246	457240
82	75	75	42x24	3	750	-	457262	-	457260
82	75	75	47x14	3	750	457272	457274	457276	457270
82	90	90	47x14	3	900	-	457294	-	457290
82	100	100	47x16	3	1000	457352	457354	457356	457350
82	100	100	42x24	3	1000	-	-	-	457360
85	62	62	47x14	3	650	457532	457534	457536	457530
85	70	70	47x14	3	700	457552	457554	457556	457550
85	75	75	47x14	3	750	457592	457594	457596	457590
85	78	78	52x18	3	780	-	457602	457604	457600
85	80	80	47x14	3	800	457622	457624	457626	457620
85	90	90	47x14	3	900	457682	457684	457686	457680
85	95	95	47x14	3	950	-	457697	-	457695
85	100	100	47x14	3	1000	457732	457734	457736	457730
85	110	110	47x32	3	1050	-	-	-	457740

12/99

Alle mål er i mm.
All measurements are in mm.