

Grå termoplastisk afsmitningsfri elastik gummihjul shore A63 +/-3 med kunststoffælg.

Monteret i zinkkromatiserede apparathjulsgafler.

Svingbare gafler er med dobbelt kuglekrans.

Bremsegafler er med totalbremse.

Anvendelsestemperatur fra -20°C til +60°C.

Grey non marking thermoplastic elastic ring hardness 63 +/-3 shore A. Wheel centre in thermoplastic material. Light duty zincplated castors.


Swivel castors with double ball races.

Swivel castors with double ball races.

Swivel castors with double ball races.

Combined swivel and wheel brake.

Temperature range: -20°C to +60°C. (-4°F/+140°F).

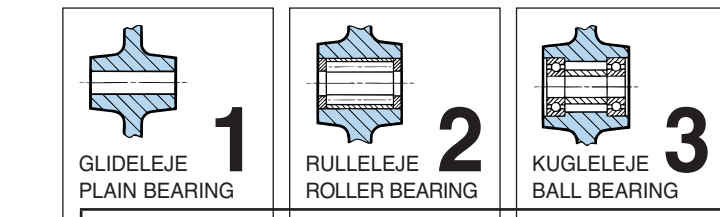

		KG	BESTILLINGSNR. ARTICLE NO.					MONTERINGSMÅL MOUNTING MEASUREMENTS							BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS			
			1	2	3	4	5	6	7	8	9	10	11	12		13	14	15	16
50	1	45	7774145	7774345	7774445	7774565	7774745	71	26	60x60	45x45	6	10	81	476450	20	21	8	45
75	1	50	7774159	7774359	7774479	7774579	7774759	106	26	60x60	45x45	6	°	95	476470	22	27	8	60
100	1	60	7774184	7774374	7774484	7774594	7774774	135	37	76x70	60x50	8	°	120	476510	30	33	12	80
125	1	70	7774204	7774394	7774504	7774614	7774794	159	38	76x70	60x50	8	°	122	476580	31	34	12	100

*Reduktionsring M10 = best. nr. 33200/*Reduction ring for 10 mm. bolt = article no. 33200

°Reduktionsring M12 = best. nr. 33300°Reduction ring for 12 mm. bolt = article no. 33300

APPARATHJUL

GRÅ TERMOPLASTISKE »ELASTIK«
GUMMIHJUL. Ø50 TIL Ø125 MM.

BELASTNING FRA
45- 70 KG.

INSTITUTIONAL CASTORS

GREY THERMOPLASTIC »ELASTIC«
RUBBERWHEELS. SIZE: Ø50 TO Ø125 MM.

LOAD CAPACITY:
45- 70 KG.

