

Grå termoplastisk afsmitningsfri elastik gummi hjul shore A63 +/-3 med kunststoffælg.

Monteret i rustfri apparathjulsgafler kvalitet AISI 304.

Svingbare gafler er med dobbelt kuglekrans kvalitet AISI 420.

Bremsegafler er med totalbremse.

Anvendelsestemperatur fra -20°C til +60°C.

Grey non marking thermoplastic elastic ring hardness 63 +/-3 shore A.


Wheel centre in thermoplastic material.

Light duty castors in stainless steel. AISI 304.

Swivel castors with double ball races in AISI 420.

Combined swivel and wheel brake.

Temperature range: -20°C to +60°C. (-4°F/+140°F).

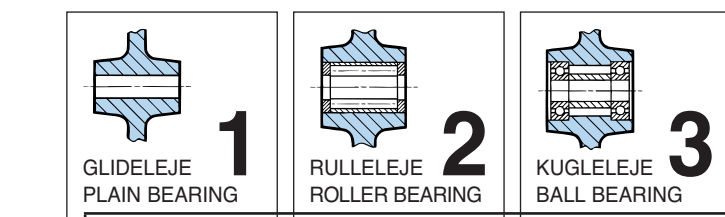

Ø	1	KG	BESTILLINGSNR. ARTICLE NO.						MONTERINGSMÅL MOUNTING MEASUREMENTS						BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS			
			7794150	7794340	7794420	7794560	7794740	106	26	60x60	45x45	6	*°	95		476475	22	27	10
75	1	60	7794150	7794340	7794420	7794560	7794740	106	26	60x60	45x45	6	*°	95	476475	22	27	10	60
100	1	80	7794170	7794350	7794440	7794580	7794760	133	38	76x70	60x50	8	*°	120	476510	30	33	12	80
125	1	100	7794215	7794395	7794460	7794600	7794780	157	39	76x70	60x50	8	*°	122	476580	31	34	12	100

*Reduktionsring M10 = best. nr. 33200/*Reduction ring for 10 mm. bolt = article no. 33200

°Reduktionsring M12 = best. nr. 33300/°Reduction ring for 12 mm. bolt = article no. 33300

APPARATHJUL RUSTFRI

GRÅ TERMOPLASTISKE »ELASTIK«
GUMMIHJUL. Ø75 TIL Ø125 MM.

BELASTNING FRA
60 – 100 KG.

INSTITUTIONAL CASTORS STAINLESS STEEL

GREY THERMOPLASTIC »ELASTIC«
RUBBERWHEELS. SIZE: Ø75 TO Ø125 MM.

LOAD CAPACITY:
60 – 100 KG.

