

Hvide termoplastiske kunststofhjul, shore D62+/-2.
 Monteret i opsvejste lakerede sværlastgafler.
 Svingbare gaffer er med forsejlet axial kugleleje og konisk rulleleje.
 Anvendelsestemperatur fra -20°C til +70°C.


Thermoplastic wheels in colour white, hardness 62+/-2 shore D
 Heavy duty fabricated castors with painted finish.
 Swivel castors with sealed axial ball bearing and tapered roller bearing.
 Temperature range: -20°C to +70°C. (-4°F/+158°F).

SVÆRLAST

TERMOPLASTISKE KUNSTSTOF- HJUL HVIDE: Ø85 TIL Ø250 MM. **BELASTNING FRA 700 - 1000 KG.**

HEAVY DUTY

WHITE THERMOPLASTIC WHEELS SIZE: Ø85 TO Ø250 MM. **LOAD CAPACITY: 700 - 1000 KG.**

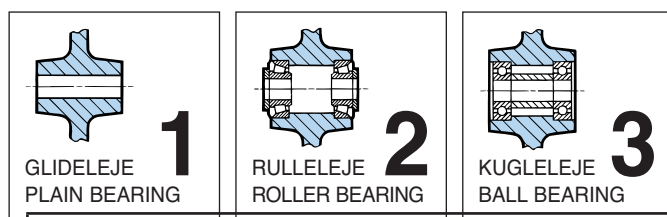

Ø	H	KG	BESTILLINGSNR. ARTICLE NO.			MONTERINGSMÅL MOUNTING MEASUREMENTS								BEST. NR. ART. NO.	HJULDIMENSIONER WHEEL DIMENSIONS			
			U	V	W	U	V	W	X	Y	Z	AA	BB		CC	KG		
85	3	1000	6233419	6233549	-	125	51	137x110	105x80	12	-	-	437680	75	75	20	1500	
100	3	1000	6233429	6233559	-	143	50	137x112	105x80	12	-	-	424188	2x34	2x44	15	500	
125	3	700	6233439	6233569	-	170	46	136x111	105x80	12	-	-	424235	51	58	20	700	
150	3	850	6233449	6233589	-	206	54	136x111	105x80	12	-	-	424252	51	59	20	850	
160	3	850	6233469	6233599	-	211	54	136x111	105x80	12	-	-	424265	51	58	20	850	
200	3	1000	6233479	6233609	-	248	57	181x155	125x102	16	-	-	424340	51	58	25	1000	
250	3	1000	6233499	6233629	-	305	59	183x155	127x103	16	-	-	424400	60	64	25	1000	

12/99

Alle mål er i mm.
 All measurements are in mm.